

Two management strategies for improving passenger transfer experience in train stations

Nicholas Molyneaux, Riccardo Scarinci, Michel Bierlaire

18th Swiss Transport Research Conference

May 18th 2018



Outline

- 1 Introduction
- 2 Gating as a control strategy
- 3 Flow separators
- 4 Simulation
- 5 Conclusion & next steps



Introduction

Context


Higher capacity & faster PT services, to serve higher demand.





Context

Some of the services available at the Lausanne train station...






Motivation

- Lack of comfort, hazardous situations
- How to ensure a satisfactory level-of-service & safety?
 - Decrease pedestrian demand (not recommended!)
 - Spread the load over time & space
 - Influence pedestrian's routes
 - ...
- Simulation is needed to address the complexity of the problem

Goal: **Design a framework to evaluate the impact of management strategies and to generate optimal control policies**



Framework

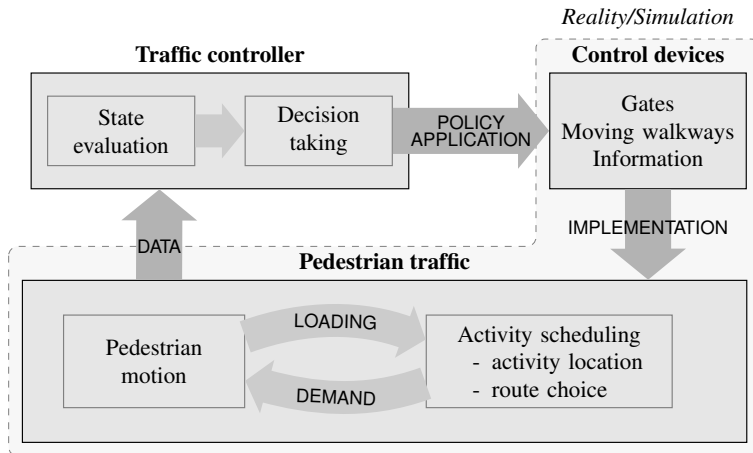



Strategies

What specific measures can be considered to impact dynamics:

- Adjustments to the PT schedule
- Control access to specific areas \Rightarrow **gates**
- Change link travel time \Rightarrow moving walkways
- Prevent counter flow \Rightarrow **flow separators**
- Attract pedestrians to specific locations



Existing strategies

Pedestrian management

- Little research on specific strategies.
- Some static measures (design) have been studied.

Traffic management

- Ramp metering
- Perimeter control
- Variable message signs
- Traffic lights
- ...



Perimeter control - Keyvan-Ekbatani et al. (2012)

- Exploit the properties of the MFD
- Develop process equation for "total time spent" and "total traveled distance".
- Calibrate PI controller based on simulation data from a city.

We will follow the same approach, except for pedestrian traffic.




Gating as a control strategy



Setup

The level-of-service must be measured and controlled inside area A .

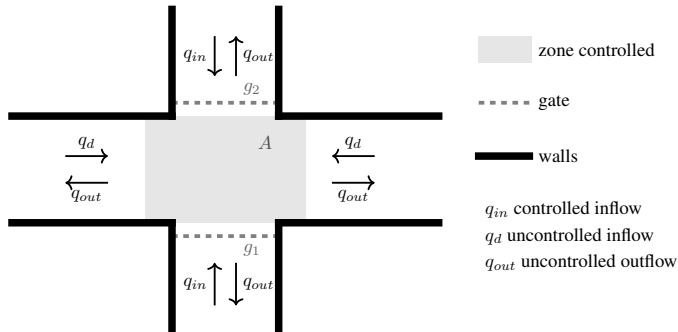



Process equation development

Conservation of pedestrians:

$$\frac{dN(t)}{dt} = q_{in}(t) + q_d(t) - q_{out}(t) \quad (1)$$

with:

- N is the number of people inside area A
- q_{in} **controlled** inflow
- q_d **uncontrolled** inflow
- q_{out} outflow




Two hypotheses

1. Hypothesis 1: A linear relation exists between outflow and *generalized flow* ($q_{out} = C_1 \cdot q_{e,gen}$).
2. Hypothesis 2: A pedestrian fundamental diagram exists.




Hypothesis 1

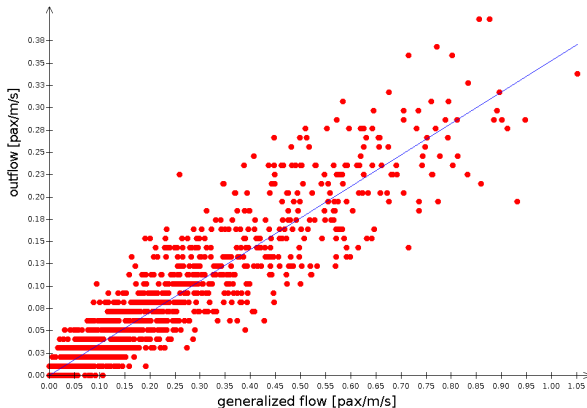


5 second intervals, based on tracking data in Lausanne



Hypothesis 2

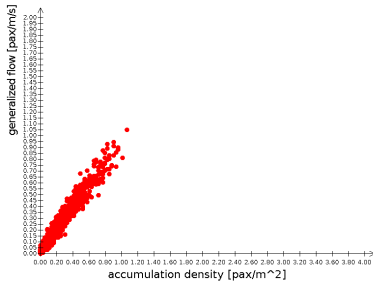

(a) Tracking data



(b) Saberi and Mahmassani (2014)



Process equation development (ctnd)

By exploiting both hypotheses and formulating the problem in terms of difference from steady state values, the process equation can be written as

$$\Delta\rho(k) = e^{-\frac{\Delta t \cdot F' \cdot C_1}{\omega_A}} \Delta\rho(k-1) + \frac{1}{F' \cdot C_1} (1 - e^{-\frac{\Delta t \cdot F' \cdot C_1}{\omega_A}}) \cdot [\Delta q_{in}(k-1) + \Delta q_d(k-1)] \quad (2)$$

From the process equation, a linear quadratic regulator is developed using standard methods of optimal control.



Flow seperators

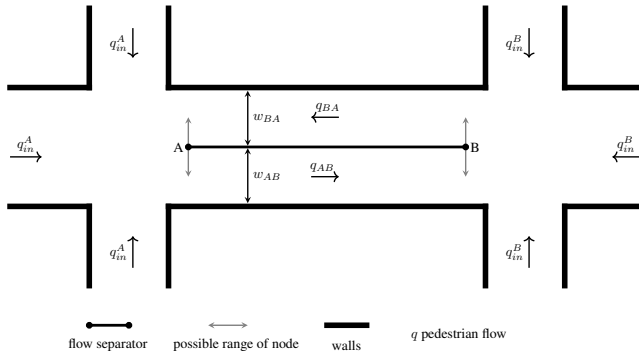


Figure: Schematic presentation of the devices used to separate the opposing flows. The inflow at each end determines the width available to each directed flow.



Width available for each direction is propotional to flows:

$$w_{AB} = \begin{cases} w \cdot f_{min,AB}, & \text{if } \frac{\sum q_{in,A}}{\sum q_{in,A} + \sum q_{in,B}} \leq f_{min,AB} \\ w \cdot f_{max,AB}, & \text{if } \frac{\sum q_{in,A}}{\sum q_{in,A} + \sum q_{in,B}} \geq f_{max,AB} \\ w \cdot \frac{\sum q_{in,A}}{\sum q_{in,A} + \sum q_{in,B}}, & \text{otherwise} \end{cases}$$



Simulation



Simulation setup

The simulation is composed of:

- the operational model from the NOMAD package.
- a route choice computed thanks to a distance-based shortest path.

Evaluate the effectiveness by comparing the pedestrian's speed.



Conclusion & next steps



Conclusions

- Assumptions have been verified thanks to empirical data.
- Usage of optimal control simplifies calibration.
- Flow separators have potential to prevent counter flow.



Next steps

Short term

1. Go back to sleep.
2. Run simulations and evaluate effectiveness.

Long term

1. Implement accelerated moving walkways
2. Model predictive control
3. Simulation based optimization



- Keyvan-Ekbatani, M., Kouvelas, A., Papamichail, I., and Papageorgiou, M. (2012). Exploiting the fundamental diagram of urban networks for feedback-based gating. *Transportation Research Part B: Methodological*, 46(10):1393 – 1403.
- Saberi, M. and Mahmassani, H. (2014). Exploring areawide dynamics of pedestrian crowds: three-dimensional approach. *Transportation Research Record: Journal of the Transportation Research Board*, (2421):31–40.
- Seborg, D. E., Mellichamp, D. A., Edgar, T. F., and Doyle III, F. J. (2010). *Process dynamics and control*. John Wiley & Sons.