

Probabilistic speed-density relationship for pedestrians based on data driven space and time representation

Marija Nikolić Michel Bierlaire Bilal Farooq

WORKSHOP ON PEDESTRIAN MODELS, EPFL, 2014

April 10, 2014

Introduction

Objective

Mathematical framework providing the detailed characterization of the pedestrian flow

Motivation

- Heterogeneity
- Complex interactions
- Multidirectional flows



Data

Data collection

- Surveys and counting
- Pedestrian tracking



Pedestrian studies


- Field data
(Fruin, 1971; Navin and Wheeler 1969; Lam et al. 2003; Rastogi et al. 2013)
- Controlled experiments
(Daamen and Hoogendoorn 2003; Seyfried et al., 2010; Kretz et al., 2006; Wong et al., 2010)



Data

Visiosafe technology


- Spin-off of EPFL
- Gare de Lausanne
- Anonymous sensor based pedestrian tracking
 - Thermal sensors
 - Range sensors
- Vision processing outcome
($t, x(t), y(t), pedestrian_{id}$)

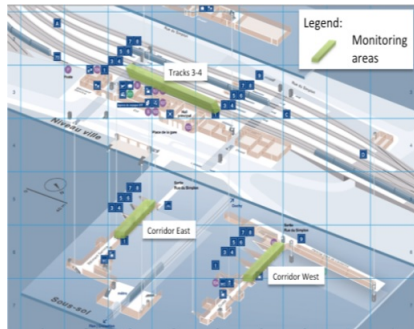

Alahi, A., Jacques, L., Boursier, Y. and Vandergheynst, P. (2011). Sparsity driven people localization with a heterogeneous network of cameras, *Journal of Mathematical Imaging and Vision* 41(1-2): 39-58.

Gare de Lausanne

Pedestrian underpass West

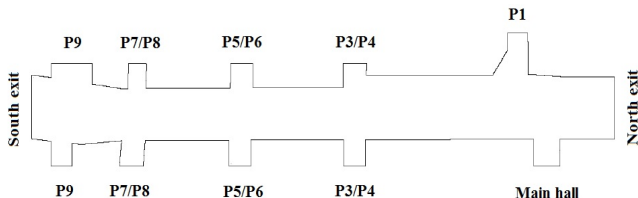


- The busiest walking area in the station
- Area $\approx 685m^2$
- Area covered by 32 sensors

Fundamental flow indicators

- Density (k)
- Speed (v)
- Flow (q)
- Fundamental diagram

$$q = v \cdot k$$

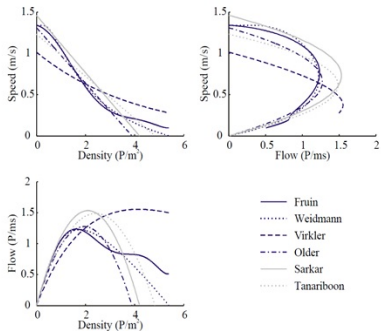

source: (Daamen et al., 2005)

Fundamental flow indicators

Issues

- Spatio-temporal discretization is arbitrary
 - Results may be highly sensitive
 - Loss of heterogeneity
- Pedestrian flow is multidirectional
(Lam et al. 2003; Wong et al., 2010)

Pedestrian-oriented flow characterization

- Detailed pedestrian tracking input
- Data driven space and time discretization

Density indicator

Pedestrian flow

- Number of pedestrians per unit of space at a given time

Spatial discretization


- Discretization units are too small - many remain empty
- Discretization units are too large - loss of information

Spatial discretization

Voronoi tessellations

- p_1, p_2, \dots, p_N is a finite set of points
- Voronoi space decomposition assigns a region to each point

$$V(p_i) = \{p \mid \|p - p_i\| \leq \|p - p_j\|, i \neq j\}$$

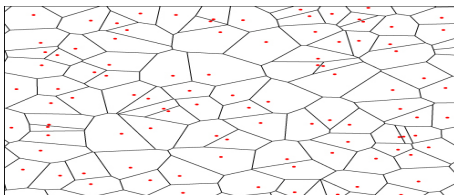

Okabe, A., Boots, B., Sugihara, K. and Chiu, S. N. (2009). *Spatial tessellations: concepts and applications of Voronoi diagrams*, Vol. 501, John Wiley & Sons.


Spatial discretization

Numerical instability

- Small polygons allocated to pedestrians in very dense areas

Delaunay triangulation

- Clustering of critical cells
- ξ , threshold distance
 $d(p_i, p_j) < \xi, \forall i, j$




Spatial discretization

Numerical instability

- Small polygons allocated to pedestrians in very dense areas

Sensitivity analyses

- $\xi = 0.4m$
- ω_i , weight associated to the corresponding space

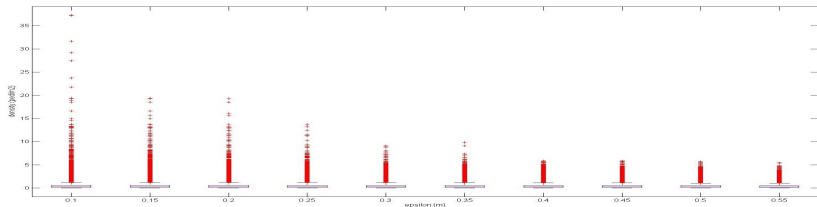


Spatial discretization

Presence of obstacles

- Assumption: two points can be connected by a straight line
- Voronoi diagram for points and Voronoi diagram areas

$$d(p_i, O) = \min_{o_j} \{\|p_i - o_j\| \mid o_j \in O\}$$

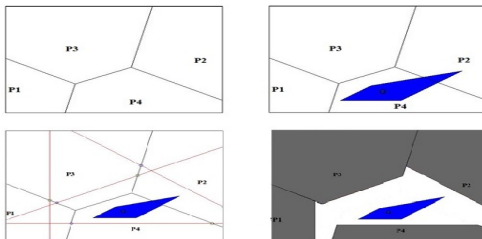

Density indicator

Definition


- Set of points: pedestrians

$$p_i = (x_i, y_i, t_i)$$

- Pedestrian-oriented density indicator

$$k_i = \frac{\omega_i}{|V(p_i)|}$$

Voronoi density map

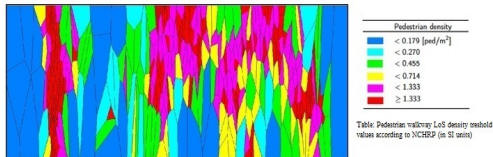

Speed indicator

Pedestrian flow

- Instantaneous speed - rate of change of position of a pedestrian with respect to time and at a particular point.

Time discretization

- Discretization interval is too small - noisy observations
- Discretization interval is too large - lower precision

Time discretization

Moment	$v_{\Delta t=0.1s}$	$v_{\Delta t=0.2}$	$v_{\Delta t=0.3s}$	$v_{\Delta t=0.4s}$	$v_{\Delta t=0.5s}$	$v_{\Delta t=0.6s}$	$v_{\Delta t=0.7s}$	$v_{\Delta t=0.8s}$	$v_{\Delta t=0.9s}$	$v_{\Delta t=1s}$
1	1.1161	1.1158	1.1156	1.1155	1.1153	1.1152	1.1150	1.1149	1.1148	1.1147
2	0.4175	0.3296	0.2956	0.2747	0.2591	0.2465	0.2358	0.2263	0.2179	0.2104
3	5.7853	2.5957	1.7703	1.4310	1.2544	1.1476	1.0740	1.0188	0.9744	0.9363
4	134.4926	31.2621	15.5319	10.9042	9.0167	8.0657	7.4917	7.0994	6.8045	6.5660

- Kruskal-Wallis test ($H=4.61$, $df=9$, $p=0.87$)
The moments represent the same population at 95% confidence level

Speed indicator

Definition

- Space-time representation


$$p_i = (x_i, y_i, t_i)$$

- Pedestrian-oriented speed indicator

$$v_i = \frac{\|p_i(t+\Delta t) - p_i(t-\Delta t)\|}{2\Delta t}, \Delta t = 1s$$

Empirical speed-density relationship

Speed-density profiles

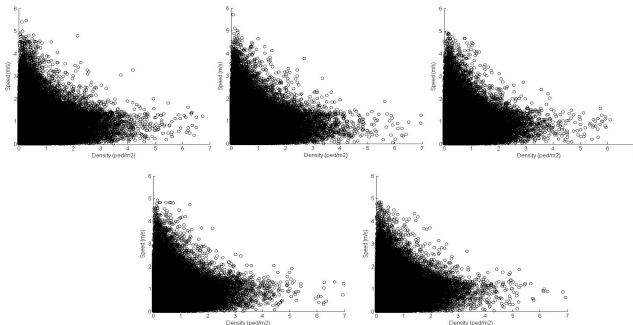

February 11.-15., 2013.: morning peak hour


Probabilistic approach

Kumaraswamy distribution

- Defined on the bounded region $[l, u]$
- Two non-negative shape parameters α and β
- The simple closed form of pdf $f(x)$ and cdf $F(x)$

$$f(x) = \frac{\alpha \cdot \beta \cdot (x-l)^{\alpha-1} \cdot ((u-l)^\alpha - (x-l)^\alpha)^{\beta-1}}{(u-l)^{\alpha \cdot \beta}}$$

$$F(x) = 1 - \left(1 - \left(\frac{x-l}{u-l}\right)^\alpha\right)^\beta$$



Kumaraswamy, P. (1980). A generalized probability density function for double-bounded random processes, *Journal of Hydrology* 46(1): 79-88.

Probabilistic approach

Speed-density relationship

$$V=f(\alpha(k),\beta(k),l(k),u(k))$$


f - Kumaraswamy pdf

V - speed

k - density level

α, β - shape parameters

u,l - boundary parameters

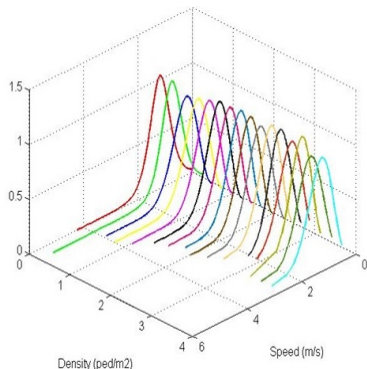

Probabilistic approach

Specification of speed-density relationship

$$V=f(\alpha(k), \beta(k), l(k), u(k))$$

Parameter	Specification#1	Specification#2
$\alpha(k)$	$a_\alpha k^3 + b_\alpha k^2 + c_\alpha k + d_\alpha$	$a_\alpha k^3 + b_\alpha k^2 + c_\alpha k + d_\alpha$
$\beta(k)$	$a_\beta \exp(b_\beta k)$	$a_\beta \exp(b_\beta k)$
$u(k)$	$a_u \exp(b_u k)$	$a_u k^3 + b_u k^2 + c_u k + d_u$
$l(k)$	0	0

Probabilistic approach

Maximum likelihood estimation

$$\log \mathcal{L} = \sum_{i=1}^n \log(\alpha(k_i)) + \sum_{i=1}^n \log(\beta(k_i)) + \sum_{i=1}^n (\alpha(k_i) - 1) \log(v_i - l(k_i)) + \sum_{i=1}^n (\beta(k_i) - 1) \log((u(k_i) - l(k_i))^{\alpha(k_i)} - (v_i - l(k_i))^{\alpha(k_i)}) - \sum_{i=1}^n \alpha(k_i) \beta(k_i) \log(u(k_i) - l(k_i))$$

Parameter	Specification #1	Specification #2
a_α	-0.0076	0.0498
b_α	0.0961	-0.2823
c_α	-0.3781	-0.0207
d_α	2.2185	2.0089
a_β	44.8191	45.362
b_β	-0.1057	-0.5945
a_u	7	0.0002
b_u	0	-0.0002
c_u		-0.0010
d_u		8.0017
$\log \mathcal{L}$	-891880	-932990

Probabilistic approach

Speed-density relationship

$$V \sim f(\alpha(k), \beta(k), l(k), u(k))$$

$$\alpha(k) = a_{\alpha}k^3 + b_{\alpha}k^2 + c_{\alpha}k + d_{\alpha}$$

$$\beta(k) = a_{\beta} \exp(b_{\beta}k)$$

$$u(k) = 7$$

$$l(k) = 0$$

$$a_{\alpha} = -0.0076, b_{\alpha} = 0.0961, c_{\alpha} = -0.3781, d_{\alpha} = 2.2185$$

$$a_{\beta} = 44.8191, b_{\beta} = -0.1057$$

Probabilistic approach

Validation

- Moments of empirical and predicted discrete joint distributions
- Kruskal-Wallis test ($H=0.33$, $df=1$, $p=0.5637$)

The model and data represent the same population at 95% confidence level

Moments	Data	Model prediction
1	0.9333	0.9856
2	0.1845	0.2376
3	0.0426	0.0648
4	0.1521	0.1769

Conclusion

- Pedestrian-oriented flow characterization
- Data-driven space and time discretization
- Probabilistic methodology to describe observed heterogeneity
- Model estimation and validation based on pedestrian tracking input
- Case study: Gare de Lausanne

Future directions

- The framework is insufficient to explain the multidirectional nature of pedestrian flows
- Solution investigated: a stream-based approach
- Final objective: integration of the stream-based concept with the developed probabilistic framework

Thank you

References

- Alahi, A., Jacques, L., Boursier, Y. and Vandergheynst, P. (2011). Sparsity driven people localization with a heterogeneous network of cameras, *Journal of Mathematical Imaging and Vision* 41(1-2): 39-58.
- Daamen, W. and Hoogendoorn, S. P. (2003). Experimental research of pedestrian walking behavior, *Transportation Research Record: Journal of the Transportation Research Board* 1828(1): 20-30.
- Daamen, W., Hoogendoorn, S. P., and Bovy, P. H. (2005). First-order pedestrian traffic flow theory. *Transportation Research Record: Journal of the Transportation Research Board*, 1934(1), 43-52.
- Fruin, J. J. (1971). Pedestrian planning and design, *Technical report*.
- Kretz, T., Grünebohm, A., Kaufman, M., Mazur, F. and Schreckenberg, M. (2006). Experimental study of pedestrian counterflow in a corridor, *Journal of Statistical Mechanics: Theory and Experiment* 2006(10): P10001.
- Kumaraswamy, P. (1980). A generalized probability density function for double-bounded random processes, *Journal of Hydrology* 46(1): 79-88.

References

Navin, F. and Wheeler, R. (1969). Pedestrian flow characteristics, *Traffic Engineering*, Inst Traffic Engr 39.

Okabe, A., Boots, B., Sugihara, K. and Chiu, S. N. (2009). *Spatial tessellations: concepts and applications of Voronoi diagrams*, Vol. 501, John Wiley & Sons.

Rastogi, R., Chandra, S. et al. (2013). Pedestrian flow characteristics for different pedestrian facilities and situations.

Seyfried, A., Boltes, M., Kahler, J., Klingsch, W., Portz, A., Rupprecht, T., Schadschneider, A., Steffen, B. and Winkens, A. (2010). Enhanced empirical data for the fundamental diagram and the flow through bottlenecks, *Pedestrian and Evacuation Dynamics 2008*, Springer, pp. 145-156.

Wong, S., Leung, W., Chan, S., Lam, W. H., Yung, N. H., Liu, C. and Zhang, P. (2010). Bidirectional pedestrian stream model with oblique intersecting angle, *Journal of transportation Engineering* 136(3): 234-242.