

Exploratory Analysis of Demand Interaction in the Planning of Passenger Railway Service

Tomáš Robenek
Jianghang Chen
Michel Bierlaire

STRC 2013
Ascona

April 24, 2013

Motivation



Agenda

- 1 Motivation
- 2 Railway Planning
- 3 Line Planning Problem
- 4 Train Timetabling Problem
- 5 Possible Research

- 1 Motivation
- 2 Railway Planning
- 3 Line Planning Problem
- 4 Train Timetabling Problem
- 5 Possible Research

It all started . . .

. . . back in the Greece

- *c. 600 BC - A basic form of the railway, the rutway, - existed in ancient Greek and Roman times, the most important being the ship trackway Diolkos across the Isthmus of Corinth. Measuring between 6 and 8.5 km, remaining in regular and frequent service for at least 650 years, and being open to all on payment, it constituted even a public railway, a concept which according to Lewis did not recur until around 1800. The Diolkos was reportedly used until at least the middle of the 1st century AD, after which no more written references appear.*
- Timeline of railway history; From Wikipedia, the free encyclopedia

It all started . . .

. . . back in the Greece

- *c. 600 BC - A basic form of the railway, the rutway, - existed in ancient Greek and Roman times, the most important being the ship trackway Diolkos across the Isthmus of Corinth. Measuring between 6 and 8.5 km, remaining in regular and frequent service for at least 650 years, and being open to all on payment, it constituted even a public railway, a concept which according to Lewis did not recur until around 1800. The Diolkos was reportedly used until at least the middle of the 1st century AD, after which no more written references appear.*
- Timeline of railway history; From Wikipedia, the free encyclopedia

Get directions My places

Did you mean a different: [diolkos, greece](#)

Add Destination - Show options

GET DIRECTIONS

Suggested routes

Ei. Venizelou/Ελ. Βενιζέλου 9.1 km, 12 mins

 Palaia EO Athinon Korinthou/ Παλαιά ΕΟ Αθηνών Κορίνθου 11.4 km, 16 mins

Driving directions to Isthmia, Greece

 This route has tolls.

99 Posidonos st.

 Loutraki 203 00, Greece

1. Head north on Posidonos/Ποσειδώνος
2. Turn right onto M. Merkouri/Μ. Μερκούρη
3. Turn right onto Ei. Venizelou/Επαρ.Οδ. Μεγαρον-Παράχωρα/ΕΑ. Βενιζέλου/ Επαρ.Οδ. Μεγίστων-Παράχωρα Continue to follow Ei. Venizelou/ΕΑ. Βενιζέλου
4. Turn right onto Palaia EO Athinon Korinthou/Παλαιά ΕΟ Αθηνών Κορίνθου
5. Turn left toward Epar.Od. Gefiras Isthmou - Isthmion/Επαρ.Οδ. Γέφυρας Ισθμού - Ισθμίων

Partial toll road


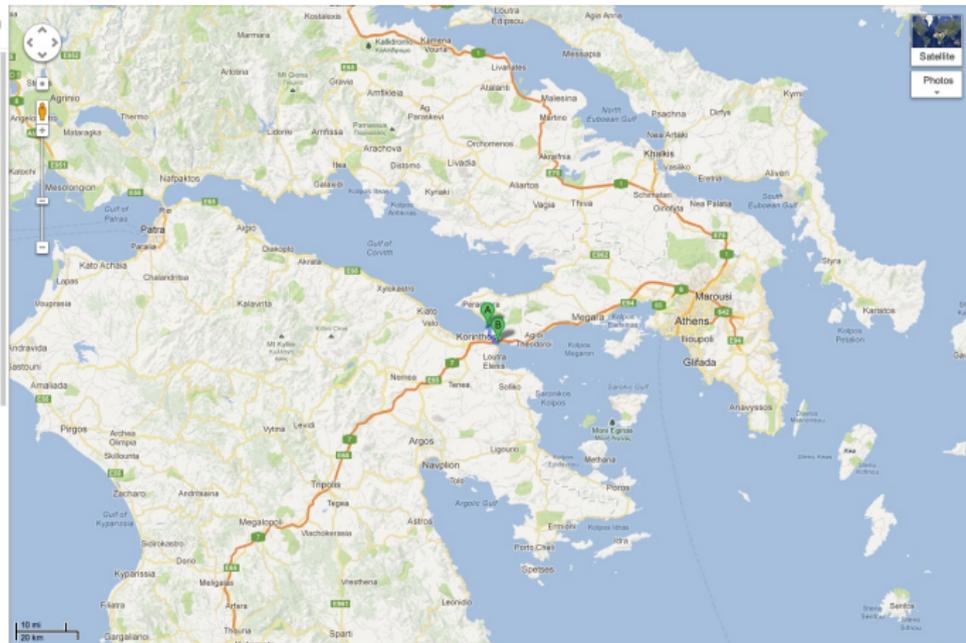


Figure : Source – Google Maps

Railway Planning Horizon

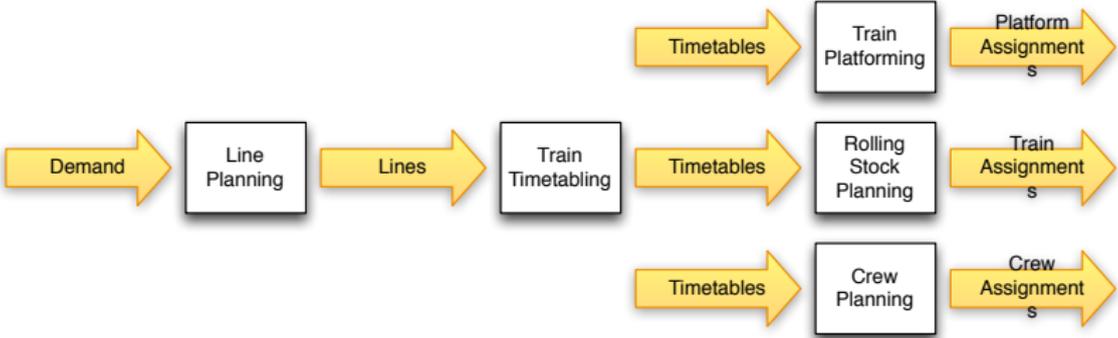

Day 0



Figure : Canadian Soldiers Building a Light Railway, [ca.1918]¹


References



A. Caprara, L. G. Kroon, M. Monaci, M. Peeters, and P. Toth, *Passenger railway optimization*, Handbooks in Operations Research and Management Science (C. Barnhart and G. Laporte, eds.), vol. 14, Elsevier, 2007, pp. 129–187 (English).

- 1 Motivation
- 2 Railway Planning
- 3 Line Planning Problem
- 4 Train Timetabling Problem
- 5 Possible Research

Line Planning Problem (LPP)

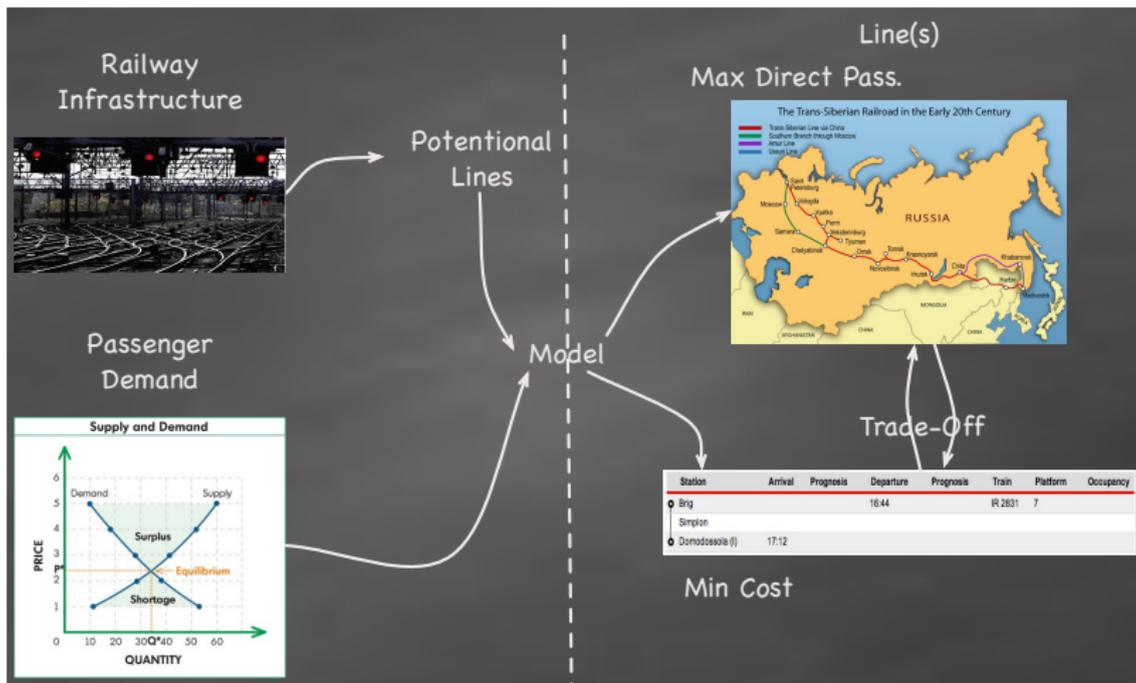

LPP Model I

- $G = (V, E)$ – undirected graph G representing the railway network
- $v \in V$ – set of stations
- $e \in E$ – set of edges representing the tracks between stations
- $p \in P$ – set of unordered pairs of stations ($p = (p_1, p_2)$) with positive demand
- d_p – number of passengers, that want to travel between stations p_1 and p_2
- E_p – set of edges on the shortest path between stations p_1 and p_2
- $d_e = \sum_{p: e \in E_p} d_p$ – the total number of passengers, that want to travel along edge e
- $l \in L$ – set of potential lines (assumed to be known a priori)
- E_l – set of edges of the line l
- $f \in F$ – set of potential frequencies
- $c \in C$ – set of available capacities
- $i \in I$ – set of indices representing combination of assigned capacity c and frequency f to a line l
- k_i – operational cost for a combination i (e.g. train driver, conductor(s), carriage kilometers)

$$x_i = \begin{cases} 1 & \text{if and only if line } l_i \text{ is to be operated with a frequency } f_i \text{ and capacity } c_i, \\ 0 & \text{otherwise.} \end{cases}$$

- d_{lp} – number of direct passengers traveling on line l between the pair of stations p

LPP Model II

$$\max \quad w_1 \cdot \sum_{l \in L} \sum_{p \in P} d_{lp} - w_2 \cdot \sum_{i \in I} k_i \cdot x_i \quad (1)$$

$$\text{s.t.} \quad \sum_{i \in I: l_j = l} x_i \leq 1, \quad \forall l \in L, \quad (2)$$

$$\sum_{i \in I: e \in E_i} f_i \cdot c_i \cdot x_i \geq d_e, \quad \forall e \in E, \quad (3)$$

$$\sum_{p \in P: e \in E_p} d_{lp} \leq f_j \cdot c_j \cdot x_j, \quad \forall l \in L, \forall e \in E, \quad (4)$$

$$\sum_{l \in L: E_p \subset E_l} d_{lp} \leq d_p, \quad \forall p \in P, \quad (5)$$

$$x_i \in \{0, 1\}, \quad \forall i \in I, \quad (6)$$

$$d_{lp} \geq 0, \quad \forall l \in L, \forall p \in P. \quad (7)$$

- 1 Motivation
- 2 Railway Planning
- 3 Line Planning Problem
- 4 Train Timetabling Problem
 - Non-Cyclic
 - Cyclic
- 5 Possible Research

Train Timetabling Problem (TTP)

Non-Cyclic


- departs differently over the time horizon
- prior knowledge of the timetable needed
- lower cost

Cyclic

- departs at every cycle
- good for "unplanned" user
- higher cost

- 1 Motivation
- 2 Railway Planning
- 3 Line Planning Problem
- 4 Train Timetabling Problem
 - Non-Cyclic
 - Cyclic
- 5 Possible Research

Non-Cyclic TTP

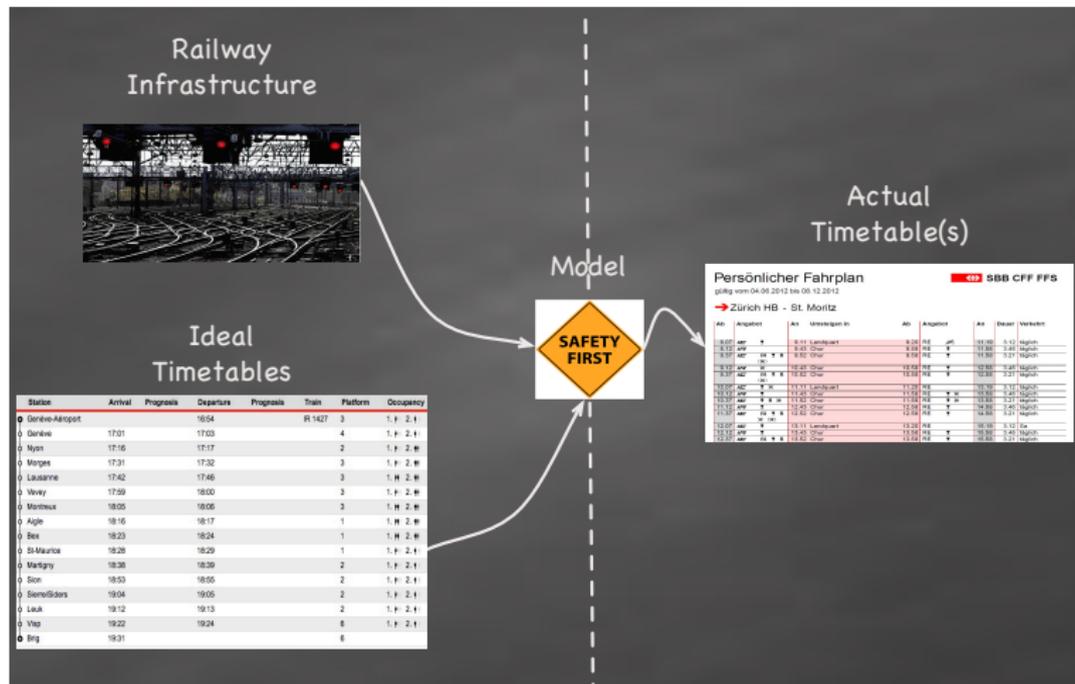

Non-Cyclic TTP Model I

$G = (V, A)$	- directed acyclic multigraph G
$v \in V$	- set of nodes
$a \in A$	- set of arcs
$t \in T$	- set of trains
$a \in A^t$	- subset of arcs used by train t
σ	- source node
τ	- sink node
p_a	- profit of arc a
$\delta_t^+(v)$	- set of arcs in A^t leaving the node v
$\delta_t^-(v)$	- set of arcs in A^t entering the node v
\mathcal{C}	- family of maximal subsets C of pairwise incompatible arcs

$$x_a = \begin{cases} 1 & \text{if and only if the path in the solution associated with train } t \text{ contains arc } a, \\ 0 & \text{otherwise.} \end{cases}$$

Non-Cyclic TPP Model II

$$\max \sum_{t \in T} \sum_{a \in A^t} p_a \cdot x_a \quad (8)$$

$$\text{s.t.} \quad \sum_{a \in \delta_t^+(\sigma)} x_a \leq 1, \quad \forall t \in T, \quad (9)$$


$$\sum_{a \in \delta_t^-(\nu)} x_a = \sum_{a \in \delta_t^+(\nu)} x_a, \quad \forall t \in T, \forall \nu \in V \setminus \{\sigma, \tau\} \quad (10)$$

$$\sum_{a \in C} x_a \leq 1, \quad \forall C \in \mathcal{C}, \quad (11)$$

$$x_a \in \{0, 1\}, \quad \forall a \in A. \quad (12)$$

- 1 Motivation
- 2 Railway Planning
- 3 Line Planning Problem
- 4 Train Timetabling Problem
 - Non-Cyclic
 - Cyclic
- 5 Possible Research

Cyclic TTP

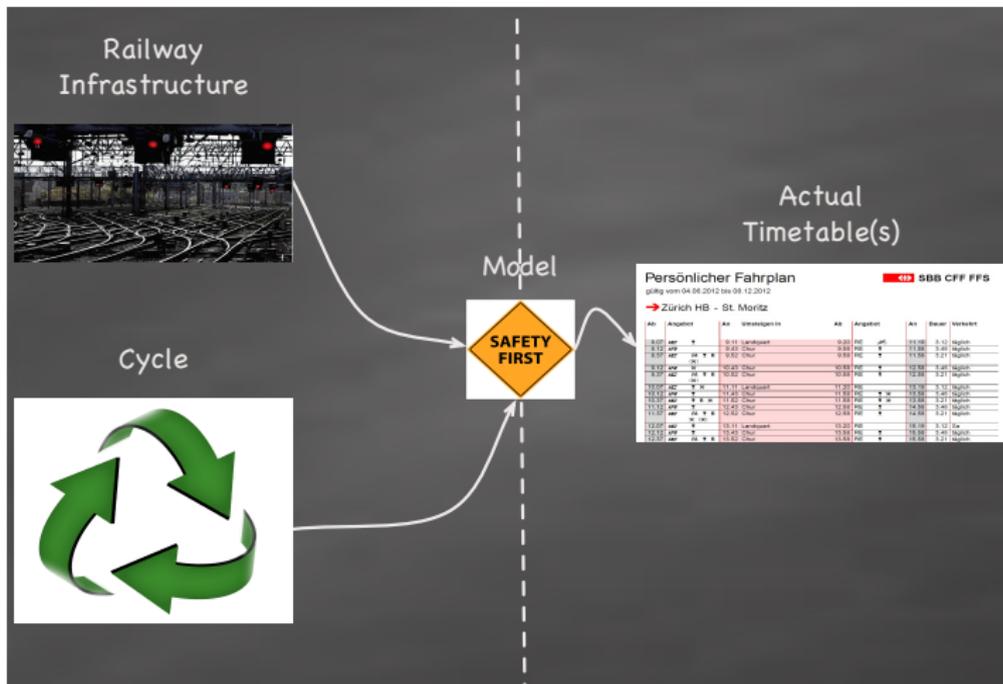

Cyclic TTP Model I

- $G = (N, A \cup A^s)$ – graph G representing the railway network
- $n, m \in N$ – set of nodes
- $a \in A$ – set of regular tracks $a = (n, m)$
- $a \in A^s$ – set of single tracks $a = (n, m) = (m, n)$
- $t \in T$ – set of trains
- $n \in N^t \subseteq N$ – set of nodes visited by train t
- $a \in A^t \subseteq A \cup A^s$ – set of tracks used by train t
- $(t, t') \in T_a$ – set of all pairs of trains (t, t') , that travel along the track a in the same direction, where t' is the faster train
- $(t, t') \in T_a^s$ – set of all pairs of trains (t, t') , that travel along the single track a in the opposite direction, where t departs from n and t' departs from m
- $t \in F_n^d, F_n^a$ – set of all trains t , that have a fixed departure (arrival) at node n
- $(t, t') \in S_n$ – set of all train pairs (t, t') , $t < t'$, for which the departure times are to be synchronized at node n
- $(t, t') \in C_n$ – set of all train pairs (t, t') , $t < t'$, for which turn-around or connection constraint is required from train t to train t' at node n
- b – cycle of the timetable
- h – general headway upon departure and arrival at every node
- r_a^t – time it takes to the train t to traverse the arc a
- $\left[\underline{d}_n^t, \overline{d}_n^t \right]$ – dwell time window of the train t at the node n
- $\left[\underline{f}_n^t, \overline{f}_n^t \right]$ – fixed arrival/departure window of the train t at the node n , in the case of completely fixed arrival/departure $\underline{f}_n^t = \overline{f}_n^t$
- $\left[\underline{s}_n^{t,t'}, \overline{s}_n^{t,t'} \right]$ – time window for the synchronization of trains t and t' at node n
- $\left[\underline{c}_n^{t,t'}, \overline{c}_n^{t,t'} \right]$ – time window for the connection or turn around constraint between trains t and t' at node n
- a_n^t – arrival time of train t at node n
- d_n^t – departure time of train t from node n

Cyclic TPP Model II

$$\max F(a, d) \quad (13)$$

$$\text{s.t. } a_m^t - d_n^t = r_a^t \quad \text{mod } b, \quad \forall t \in T, a \in A^t \quad (14)$$

$$d_n^t - a_n^t \in \left[\underline{d_n^t}, \overline{d_n^t} \right] \quad \text{mod } b, \quad \forall t \in T, \forall n \in N^t, \quad (15)$$

$$d_n^{t'} - d_n^t \in \left[\underline{s_n^{t'}}, \overline{s_n^{t'}} \right] \quad \text{mod } b, \quad \forall n \in N, \forall (t, t') \in S_n, \quad (16)$$

$$d_n^{t'} - a_n^t \in \left[\underline{c_n^{t'}}, \overline{c_n^{t'}} \right] \quad \text{mod } b, \quad \forall n \in N, \forall (t, t') \in C_n, \quad (17)$$

$$d_n^{t'} - d_n^t \in \left[r_a^t - r_a^{t'} + h, b - h \right] \quad \text{mod } b, \quad \forall a \in A, \forall (t, t') \in T_a, \quad (18)$$

$$a_n^{t'} - d_n^t \in \left[r_a^t + r_a^{t'} + h, b - h \right] \quad \text{mod } b, \quad \forall a \in A^s, \forall (t, t') \in T_a, \quad (19)$$


$$d_n^t \in \left[\underline{f_n^t}, \overline{f_n^t} \right], \quad \forall n \in N, \forall t \in F_n^d, \quad (20)$$

$$a_n^t \in \left[\underline{f_n^t}, \overline{f_n^t} \right], \quad \forall n \in N, \forall t \in F_n^a, \quad (21)$$

$$a_n^t, d_n^t \in \{0, b - 1\}, \quad \forall t \in T, \forall n \in N_t. \quad (22)$$

- 1 Motivation
- 2 Railway Planning
- 3 Line Planning Problem
- 4 Train Timetabling Problem
- 5 Possible Research

Ideal Train Timetabling Problem I

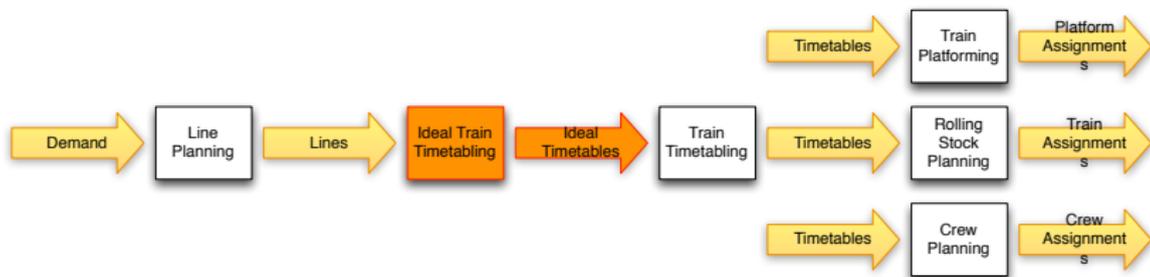

Ideal Train Timetabling Problem II

Inputs

- OD per minute (desired time of departure)
- trip threshold (binary; wait amount of time before "trashing" the trip)
- cost figures

Model

- maximize profit
- operational constraints


Outputs

- optimal solution
- or cost function

Why not done yet?

- demand is "abstract"
- complexity (dv per passenger)

Potential Outline

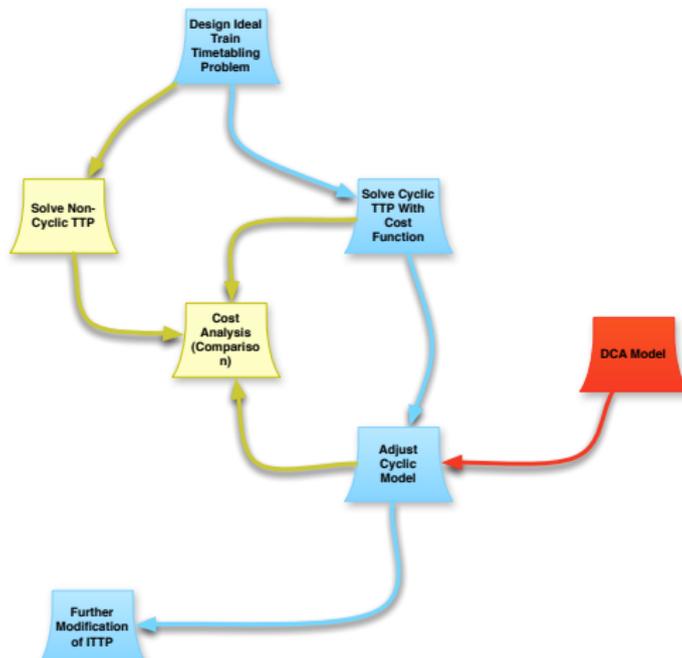



Thank you for your attention.